




Features

- 200 Watts Peak Pulse Power per Line ($t_p = 8/20\mu s$)
- Protects one I/O or power line
- Low Clamping Voltage
- Working Voltage: 5 V
- Low Leakage Current
- Response Time is Typically < 1 ns



SOD-523

IEC Compatibility (EN61000-4)

- IEC 61000-4-2 (ESD) ± 30 kV (air), ± 30 kV (contact)
- IEC 61000-4-4 (EFT) 40A (5/50ns)
- IEC 61000-4-5 (Lightning) 12A (8/20 μs)


Mechanical Characteristics

- JEDEC SOD-523 package
- Molding compound flammability rating: UL 94V-0
- Marking : Marking Code
- Packaging : Tape and Reel per EIA 481
- RoHS Compliant

Applications

- Cellular Handsets & Accessories
- Personal Digital Assistants (PDAs)
- Notebooks & Handhelds
- Portable Instrumentation
- Digital Cameras
- MP3 players

Schematic & PIN Configuration

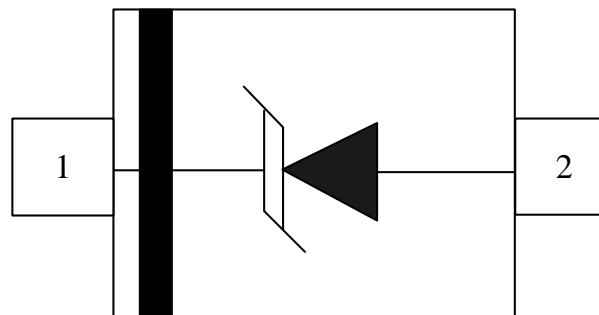


SOD-523 (Top View)

Absolute Maximum Rating			
Rating	Symbol	Value	Units
Peak Pulse Power ($t_p = 8/20\mu s$)	P_{PP}	200	Watts
Peak Forward Voltage ($I_F = 1A, t_p = 8/20\mu s$)	V_{FP}	1.4	V
Operating Temperature	T_J	-55 to + 125	°C
Storage Temperature	T_{STG}	-55 to +150	°C

Electrical Parameters (T=25°C)

Symbol	Parameter
I_{PP}	Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
V_{RWM}	Working Peak Reverse Voltage
I_R	Maximum Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current
I_F	Forward Current
V_F	Forward Voltage @ I_F

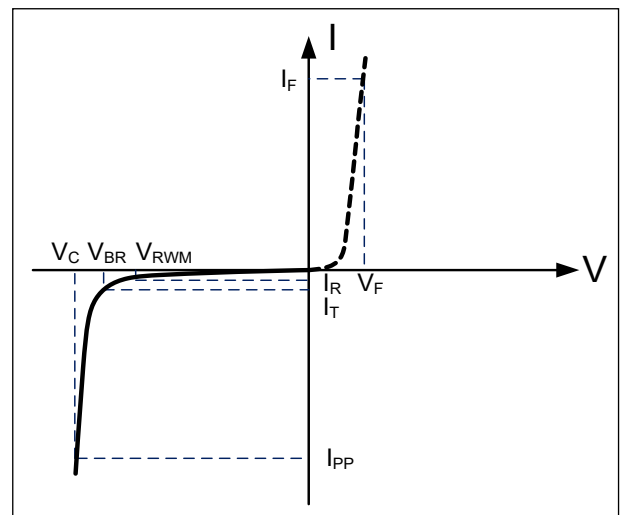

Electrical Characteristics

DW05D5-S						
Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Units
Reverse Stand-Off Voltage	V_{RWM}				5.0	V
Reverse Breakdown Voltage	V_{BR}	$I_T = 1mA$	6.0			V
Reverse Leakage Current	I_R	$V_{RWM} = 5V, T = 25^\circ C$			1	μA
Peak Pulse Current	I_{PP}	$t_p = 8/20\mu s$			12	A
Clamping Voltage	V_C	$I_{PP} = 1A, t_p = 8/20\mu s$			9.3	V
Clamping Voltage	V_C	$I_{PP} = 12A, t_p = 8/20\mu s$			17	V
Junction Capacitance	C_j	$V_R = 0V, f = 1MHz$			90	pF

Typical Characteristics

Figure 1: Peak Pulse Power vs. Pulse Time

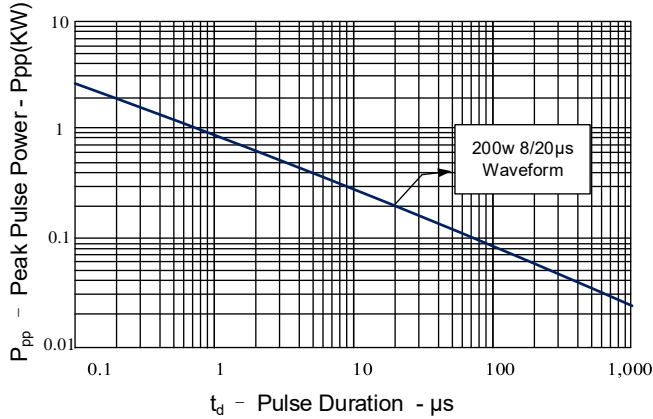


Figure 2: Power Derating Curve

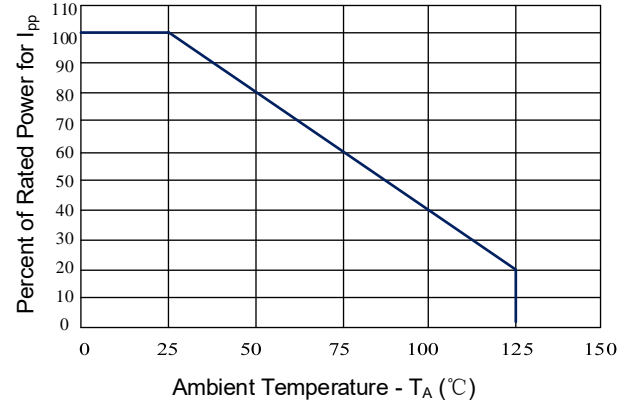


Figure 3: Clamping Voltage vs. Peak Pulse Current

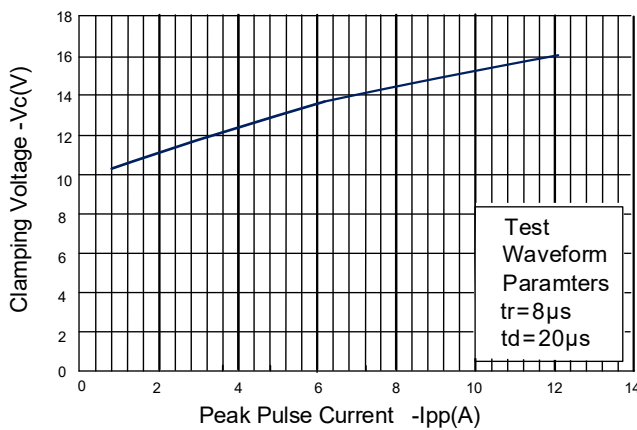


Figure 4: Normalized Junction Capacitance vs. Reverse Voltage

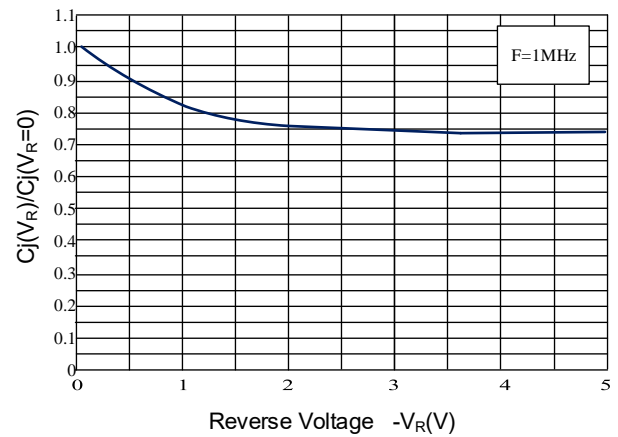


Figure 5: Pulse Waveform






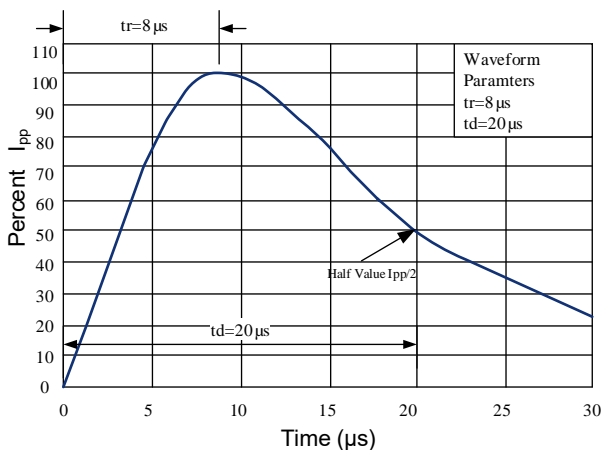


Figure 6: ESD Clamping(8kV Contact per IEC 61000-4-2)

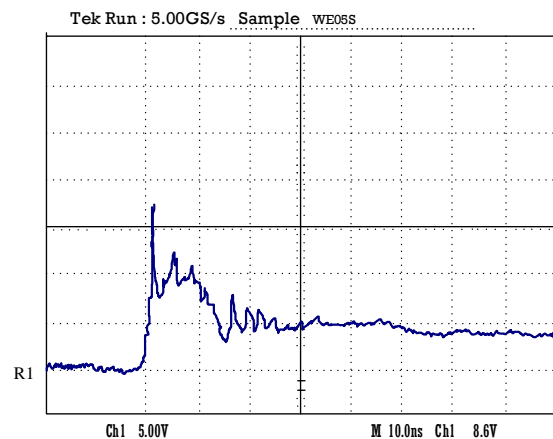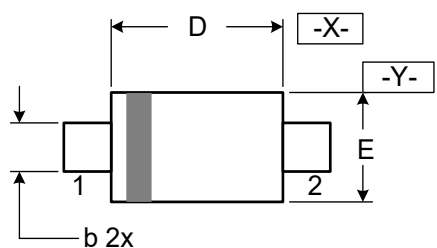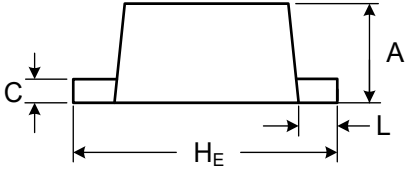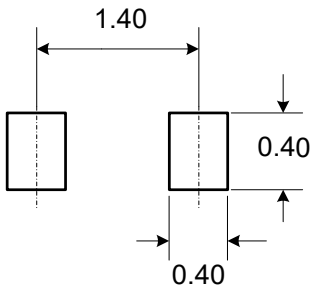

Outline Drawing – SOD-523

PACKAGE OUTLINE		 SOD-523																																															
		<table border="1"> <thead> <tr> <th rowspan="2">SYMBOL</th> <th colspan="2">MILLIMETER</th> <th colspan="2">INCHES</th> </tr> <tr> <th>MIN</th> <th>MAX</th> <th>MIN</th> <th>MAX</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>0.50</td> <td>0.70</td> <td>0.020</td> <td>0.028</td> </tr> <tr> <td>b</td> <td>0.25</td> <td>0.35</td> <td>0.010</td> <td>0.014</td> </tr> <tr> <td>C</td> <td>0.07</td> <td>0.20</td> <td>0.0028</td> <td>0.0079</td> </tr> <tr> <td>D</td> <td>1.10</td> <td>1.30</td> <td>0.043</td> <td>0.051</td> </tr> <tr> <td>E</td> <td>0.70</td> <td>0.90</td> <td>0.028</td> <td>0.035</td> </tr> <tr> <td>H_E</td> <td>1.50</td> <td>1.70</td> <td>0.059</td> <td>0.067</td> </tr> <tr> <td>L</td> <td>0.15</td> <td>0.25</td> <td>0.006</td> <td>0.010</td> </tr> </tbody> </table>				SYMBOL	MILLIMETER		INCHES		MIN	MAX	MIN	MAX	A	0.50	0.70	0.020	0.028	b	0.25	0.35	0.010	0.014	C	0.07	0.20	0.0028	0.0079	D	1.10	1.30	0.043	0.051	E	0.70	0.90	0.028	0.035	H _E	1.50	1.70	0.059	0.067	L	0.15	0.25	0.006	0.010
SYMBOL	MILLIMETER						INCHES																																										
	MIN	MAX	MIN	MAX																																													
A	0.50	0.70	0.020	0.028																																													
b	0.25	0.35	0.010	0.014																																													
C	0.07	0.20	0.0028	0.0079																																													
D	1.10	1.30	0.043	0.051																																													
E	0.70	0.90	0.028	0.035																																													
H _E	1.50	1.70	0.059	0.067																																													
L	0.15	0.25	0.006	0.010																																													
		<p>Notes</p> <ol style="list-style-type: none"> Controlling Dimensions in Millimeters. Dimensions are exclusive of mold flash and metal burrs. 																																															
 <p>DIMENSIONS: MILLIMETERS</p>																																																	

Marking Codes

Part Number	DW05D5-S
Marking Code	D5

Package Information

Qty: 5k/Reel