

## Surface Mount Schottky Rectifier

### Features

- Guardring for overvoltage protection
- Low power loss
- Extremely fast switching
- High forward surge capability
- AEC-Q101 qualified
- High frequency operation
- Solder dip 260 °C max. 10 s, per JESD 22-B106


### Typical Applications

For use in low voltage high frequency inverters, freewheeling, DC/DC converters, and polarity protection applications.

### Mechanical Data

- **Package:** DO-214AB (SMC)  
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** Color band denotes the cathode end

### DO-214AB (SMC)

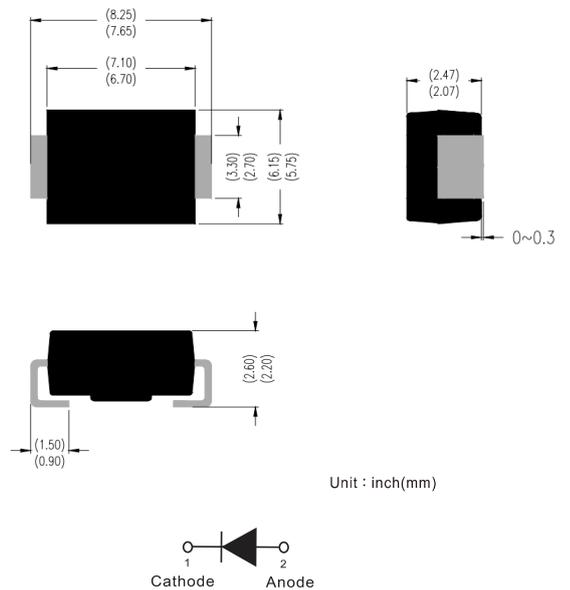

### ■ Maximum Ratings (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	SS82-Q	SS84-Q	SS86-Q	SS810-Q	SS815-Q	SS820-Q
Repetitive Peak Reverse Voltage	$V_{RRM}$	V	20	40	60	100	150	200
Average Rectified Output Current @60Hz sine wave, Resistance load, Ta (FIG.1)	$I_O$	A	8.0					
Surge(Non-repetitive)Forward Current @60Hz Half-sine wave, 1 cycle, Ta=25°C	$I_{FSM}$	A	120					
Storage Temperature	$T_{stg}$	°C	-55 ~+150					
Junction Temperature	$T_j$	°C	-55 ~+150			-55 ~+175		

### ■ Electrical Characteristics (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	SS82-Q	SS84-Q	SS86-Q	SS810-Q	SS815-Q	SS820-Q
Maximum instantaneous forward voltage drop per diode	$V_F$	V	$I_{FM} = 8.0A$	0.55		0.70	0.85	0.95	
Maximum DC reverse current at rated DC blocking voltage per diode	$I_R$	mA	Ta=25°C	0.2			0.1		
			Ta=100°C	20			5.0		
Typical junction capacitance	$C_j$	pF	Measured at 1MHz and Applied Reverse Voltage of 4.0 V.D.C.	450		350	270	180	

■ Thermal Characteristics (Ta=25°C Unless otherwise specified)

PARAMETER		SYMBOL	UNIT	SS82-Q	SS84-Q	SS86-Q	SS810-Q	SS815-Q	SS820-Q
Thermal Resistance	Between junction and ambient	R <sub>θJ-A</sub>	°C/W	45 <sup>(1)</sup>					
	Between junction and lead	R <sub>θJ-L</sub>		12 <sup>(1)</sup>					

Note (1)

Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.6" x 0.6" (16 mm x 16 mm) copper pad areas

■ Characteristics (Typical)

FIG.1: I<sub>o</sub>-T<sub>L</sub> Curve

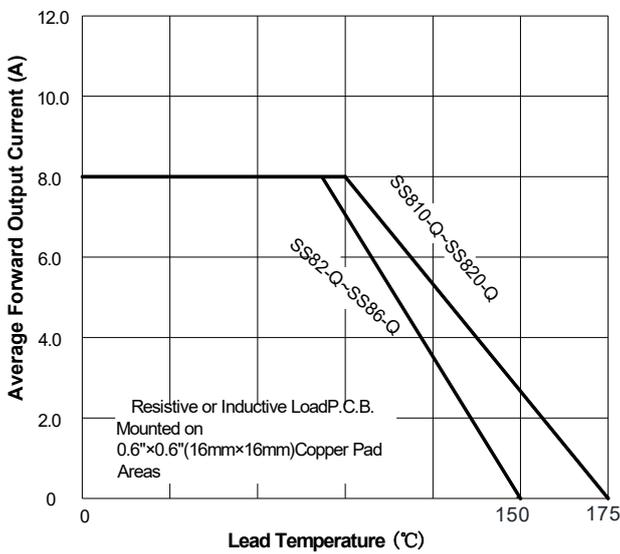


FIG.2: Forward Surge Current Capability

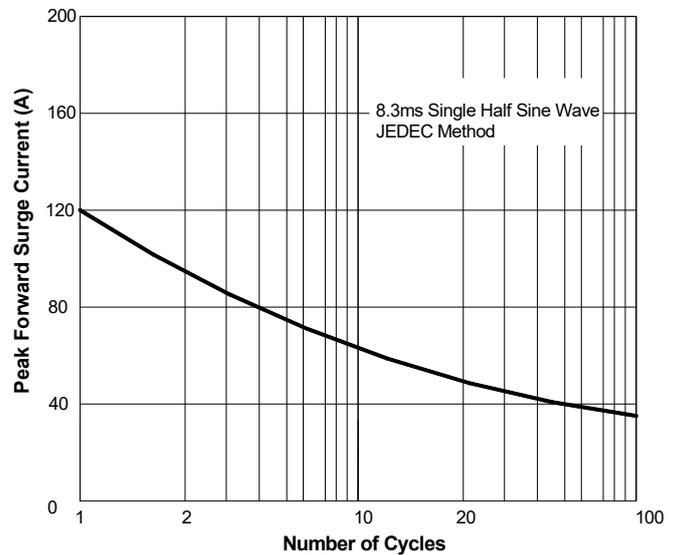


FIG.3: Forward Voltage

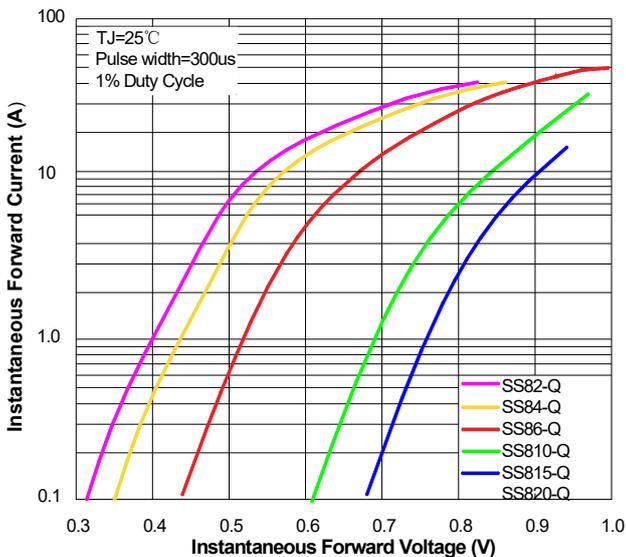


FIG.4: Typical Reverse Characteristics

